
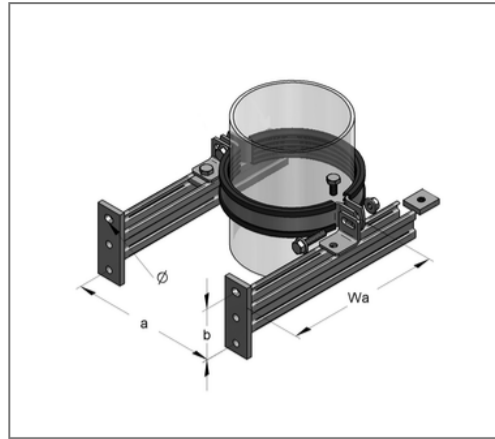


## ■ Fixpoint support for downstream piping Set SML DN 80 / 83 mm Wall distance 75 - 260 mm

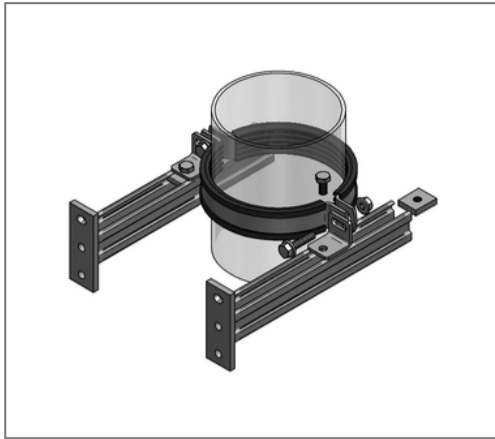

### Commercial details

|               |               |
|---------------|---------------|
| Part no.      | 4500800       |
| EAN/GTIN      | 4250928439536 |
| Packing unit  | 1 pcs         |
| Quantity unit | pcs           |
| Weight        | 1,63 kg/pc    |
| Product group | 03-450        |
| Price unit    | 1             |

### QR code



### Certification



### Specification

|                  |   |
|------------------|---|
| Application area | Brackets for the manufacture of a support for sewage downpipes. |
|------------------|---|

### Technical data

|  |            |
|--|------------|
| Material                                   | Steel      |
| Surface                                    | galvanized |
| Sound insulation lining                    | TPE        |
| min. temperature resistance                | -35 °C     |
| max. temperature resistance                | 100 °C     |
| Thickness material sound insulation lining | 6 mm       |
| Class                                      | B2         |
| Colour sound insulation lining             | black      |
| Material C-profile                         | S250JR     |

### Product details

|                       |                 |
|-----------------------|-----------------|
| Outer pipe diameter   | 83 mm           |
| Nominal pipe diameter | 80 mm           |
| Hole distance b       | 55 mm           |
| Length console        | 263 mm          |
| load F1               | 1,44 kN         |
| load F2               | 0,72 kN         |
| Console type          | C-profile 35/21 |
| Screw type            | M10x20          |
| Pipe clamp type       | Maxima PSM      |

## Product details

|                        |                               |
|------------------------|-------------------------------|
| Distance measure a     | 140 mm                        |
| Type distance angle    | Distance angle single 42x35x4 |
| Type of threaded plate | M10 35x30                     |
| max. wall distance WA  | 260 mm                        |
| min. wall distance WA  | 75 mm                         |
| Elongated hole         | 11x15 mm                      |