
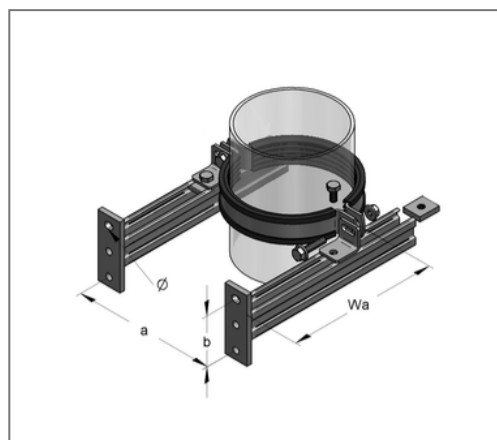


## ■ Fixpoint support for downstream piping Set SML DN 125 / 135 mm Wall distance 85 - 300 mm

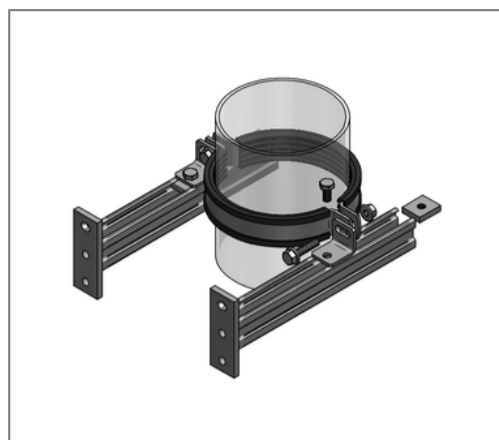

### Commercial details

|               |               |
|---------------|---------------|
| Part no.      | 4501250       |
| EAN/GTIN      | 4250928439550 |
| Packing unit  | 1 pcs         |
| Quantity unit | pcs           |
| Weight        | 2,68 kg/pc    |
| Product group | 03-450        |
| Price unit    | 1             |

### QR code



### Certification



### Specification

|             |  |
|-------------|--|
| Application | Brackets for the manufacture of a support for area |
|             | sewage downpipes.                                  |

### Technical data

|  |            |
|--|------------|
| Material                                   | Steel      |
| Surface                                    | galvanized |
| Sound insulation lining                    | TPE        |
| min. temperature resistance                | -35 °C     |
| max. temperature resistance                | 100 °C     |
| Thickness material sound insulation lining | 6 mm       |
| Class                                      | B2         |
| Colour sound insulation lining             | black      |
| Material C-profile                         | S235JR     |

### Product details

|                       |            |
|-----------------------|------------|
| Outer pipe diameter   | 135 mm     |
| Nominal pipe diameter | 125 mm     |
| Hole distance b       | 80 mm      |
| Length console        | 300 mm     |
| load F1               | 4,16 kN    |
| load F2               | 2,08 kN    |
| Console type          | Stex 35/42 |
| Screw type            | M10x20     |
| Pipe clamp type       | Maxima PSM |

## Product details

|                        |                               |
|------------------------|-------------------------------|
| Distance measure a     | 200 mm                        |
| Type distance angle    | Distance angle single 42x35x4 |
| Type of threaded plate | M10 35x30                     |
| max. wall distance WA  | 300 mm                        |
| min. wall distance WA  | 85 mm                         |
| Elongated hole         | 11x15 mm                      |