


■ Insulated pipe clamp Husky IV 19 40 mm Insulation 20,5 M8/M10

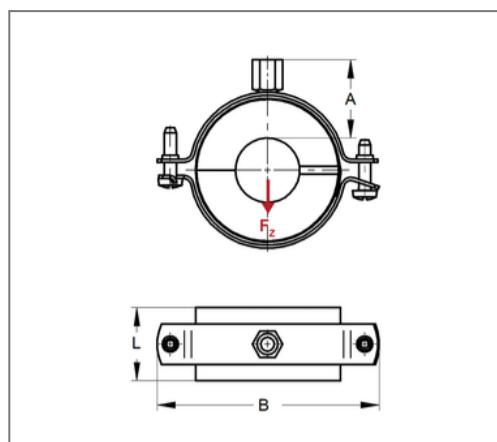

Commercial details

| | |
|---------------|---------------|
| Part no. | 6840400 |
| EAN/GTIN | 4250928440754 |
| Packing unit | 12 pcs |
| Quantity unit | pcs |
| Weight | 0,153 kg/pc |
| Product group | 06-684 |
| Price unit | 1 |

QR code



Certification



Specification

| | |
|------------------|--|
| Application area | A thermal decoupled mounting of tubes guarantees a reliable prevention of condensate for refrigeration, air-conditioning and drinking water technologies in the sector pipe-clamping |
| Insulation body | KA/PU |

Technical data

| | |
|-----------------------------------|-----------------------|
| Material | Steel |
| Material type | DD11 |
| Material coat | Plastic |
| Surface | galvanized |
| Class | B2 |
| min. temperature resistance | -45 °C |
| max. temperature resistance | 105 °C |
| Thermal conductivity | 0,029 W/mK |
| Density shell | 120 kg/m ³ |
| Water vapour diffusion resistance | 20000 μ |

Product details

| | |
|----------------------|------------------------|
| Connection | M8/M10 |
| Connection height A | 40 mm |
| Width B | 124 mm |
| Insulation thickness | 20,5 mm |
| load F_z | 0,34 kN |
| Length shell L | 42 mm |
| statical load shell | 0,27 N/mm ² |

Remark

| | |
|--------|--|
| Notice | Von Umtausch und Rücknahme ausgeschlossen. Sonderanfertigungen auf Anfrage. |
| Note | delivery time on demand |