
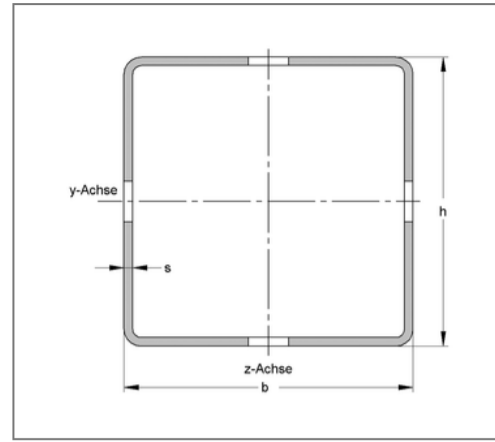
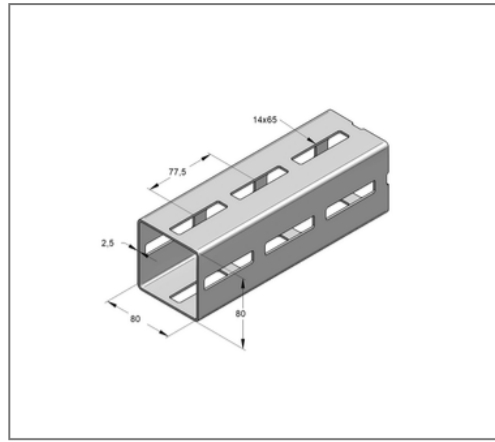


## ■ Profile rail CENTUM XL 80 80 / 80 / 2,5 mm L= 6 m hot-dip galv.

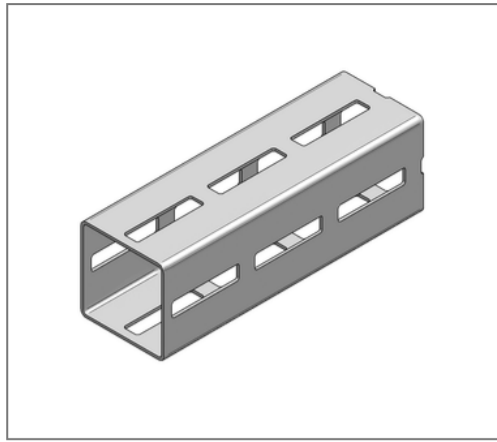

### Commercial details

Part no.	16008060
EAN/GTIN	4250928450340
Packing unit	6 m
Bundle	150 m
Quantity unit	m
Weight	5,51 kg/m
Product group	14-160
Price unit	1

### QR code



### Certification



### Specification

Application area	Heavy-duty profile for modular industrial and plant construction.
Specification	modular system 4-sided without raster in connection with mounting parts torsion stiffness high load capacity

### Technical data

Material	Steel
Material type	S275
Surface	hot-dip galvanized

### Product details

Width	80 mm
Height	80 mm
Thickness	2,5 mm
Length	6 m
Elongated hole	14x65 mm
Area (least cross section of the profile rail)	6,19 cm <sup>2</sup>
Axial angular impulse $I_{Y}$	64,51 cm <sup>4</sup>
Axial angular impulse $I_{Z}$	64,51 cm <sup>4</sup>
Grid dimension	80 mm
Centroid distance $e_o$	4,00 cm
Centroid distance $e_u$	4,00 cm
Centroid distance $e_z$	4,00 cm
Elastic limit	275 N/mm <sup>2</sup>
Radius of inertia $i_y$	3,23 cm
Radius of inertia $i_z$	3,23 cm

## Product details

Section modulus $W_Y$	16,13 cm <sup>3</sup>
Section modulus $W_Z$	16,13 cm <sup>3</sup>