


Profile rail CENTUM XL 80 80 / 80 / 2,5 mm L= 6 m hot-dip galv.

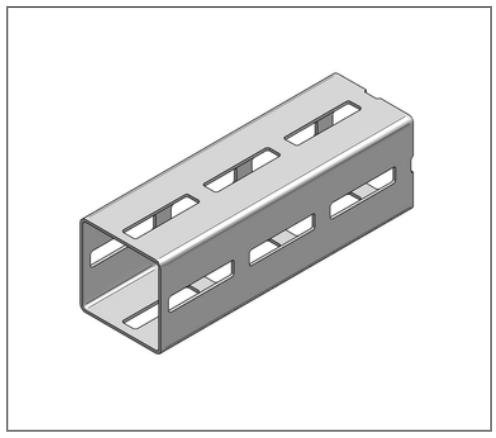

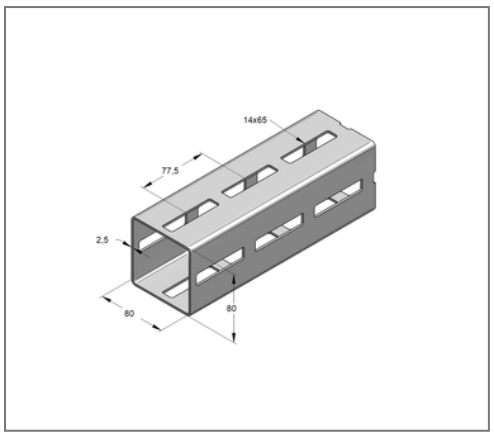

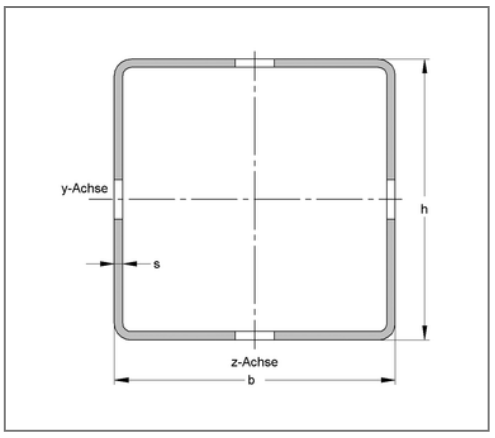

Commercial details

Part no.	16008060
EAN/GTIN	4250928450340
Packing unit	6 m
Bundle	150 m
Quantity unit	m
Weight	5,51 kg/m
Product group	14-160
Price unit	1

QR code

Certification

TSP®

CE

Specification

Application area	Heavy-duty square profile for modular industrial and plant construction.
Specification	Modular system, 4-sided without raster in connection with mounting parts, torsion stiffness, high load capacity.

Technical data

Material	Steel
Material type	S275
Surface	hot-dip galvanized
Corrosion category	C4 high / C5 medium
Surrounding area	Indoor and outdoor areas

Product details

Width	80 mm
Height	80 mm
Thickness	2,5 mm
Length	6 m
Elongated hole	14x65 mm
Area (least cross section of the profile rail)	6,19 cm^2
Axial angular impulse I_Y	64,51 cm4
Axial angular impulse I_Z	64,51 cm4
Grid dimension	80 mm
Centroid distance eo	4,00 cm
Centroid distance eu	4,00 cm
Centroid distance ez	4,00 cm
Elastic limit	275 N/mm^2

MEFA Befestigungs- und Montagesysteme GmbH | Schillerstraße 15 | 74635 Kupferzell
+ 49 7944 64 0 | info@mefa.de | www.mefa.de

Product details

Radius of inertia iy	3,23 cm
Radius of inertia iz	3,23 cm
Section modulus W_Y	16,13 cm³
Section modulus W_Z	16,13 cm³

MEFA Befestigungs- und Montagesysteme GmbH | Schillerstraße 15 | 74635 Kupferzell
+ 49 7944 64 0 | info@mefa.de | www.mefa.de