
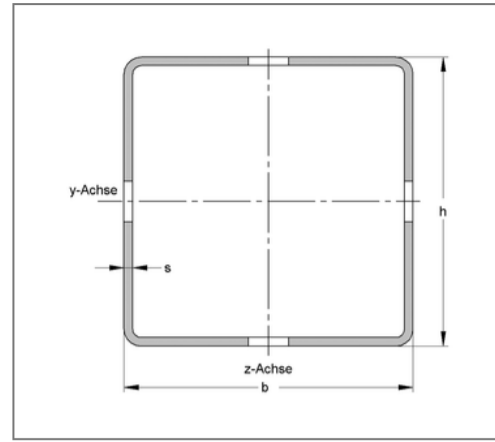
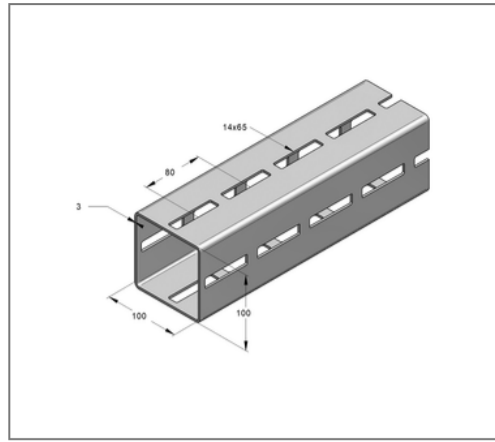


■ Profile rail CENTUM XL 100 100 / 100 / 3 mm L= 6 m hot-dip galv.

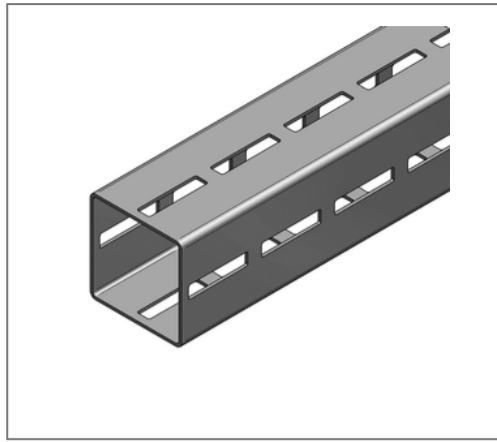

Commercial details

| | |
|---------------|---------------|
| Part no. | 16010060 |
| EAN/GTIN | 4250928436634 |
| Packing unit | 6 m |
| Bundle | 96 m |
| Quantity unit | m |
| Weight | 8,46 kg/m |
| Product group | 14-160 |
| Price unit | 1 |

QR code



Certification



Specification

| | |
|------------------|---|
| Application area | Heavy-duty profile for modular industrial and plant construction. |
| Specification | modular system 4-sided without raster in connection with mounting parts torsion stiffness high load capacity |

Technical data

| | |
|---------------|--------------------|
| Material | Steel |
| Material type | S275 |
| Surface | hot-dip galvanized |

Product details

| | |
|--|------------------------|
| Width | 100 mm |
| Height | 100 mm |
| Thickness | 3 mm |
| Length | 6 m |
| Elongated hole | 14x65 mm |
| Area (least cross section of the profile rail) | 9,73 cm ² |
| Axial angular impulse I_y | 157,14 cm ⁴ |
| Axial angular impulse I_z | 157,14 cm ⁴ |
| Grid dimension | 80 mm |
| Elastic limit | 275 N/mm ² |
| Radius of inertia i_y | 4,02 cm |
| Radius of inertia i_z | 4,02 cm |
| Section modulus W_y | 31,43 cm ³ |
| Section modulus W_z | 31,43 cm ³ |