
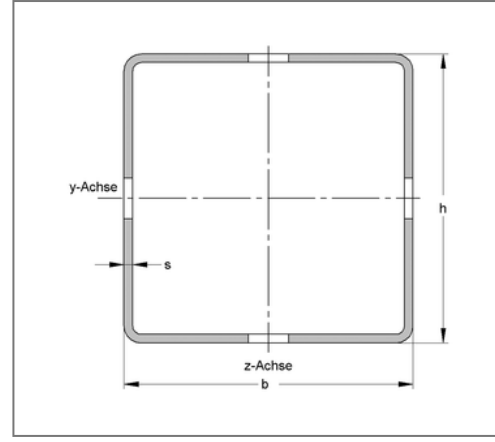
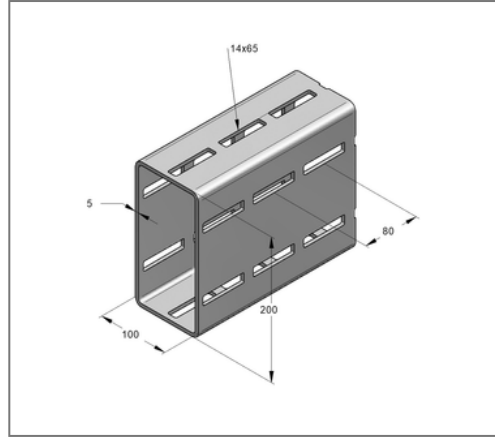



■ Profile rail CENTUM XL 200 WST 100 / 200 / 5 mm L= 8 m hot-dip galv.

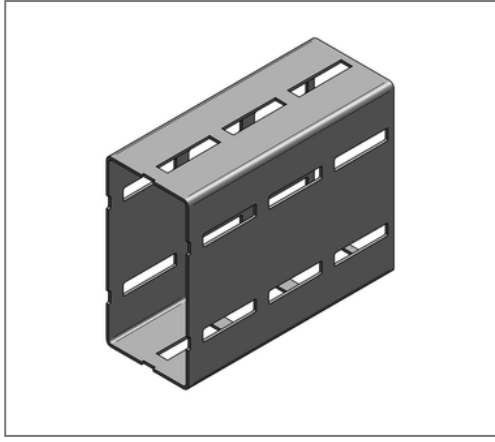

Commercial details

Part no.	16020080
EAN/GTIN	4250928449405
Packing unit	8 m
Bundle	32 m
Quantity unit	m
Weight	20,46 kg/m
Product group	14-160
Price unit	1

QR code

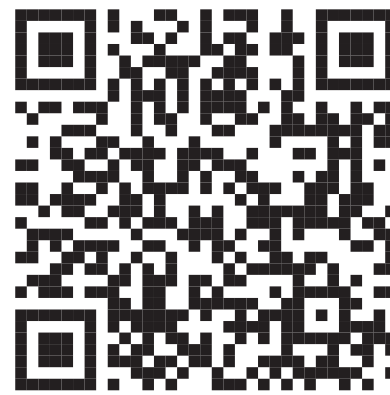

Certification



Specification

Application area	Heavy-duty profile for modular industrial and plant construction.
Specification	modular system 4-sided without raster in connection with mounting parts torsion stiffness high load capacity

Technical data

Material	Steel
Material type	S235
Surface	hot-dip galvanized

Product details

Width	100 mm
Height	200 mm
Thickness	5 mm
Length	8 m
Elongated hole	14x65 mm
Area (least cross section of the profile rail)	24,15 cm ²
Axial angular impulse I _Y	1255,68 cm ⁴
Axial angular impulse I _Z	433,47 cm ⁴
Grid dimension	80 mm
Elastic limit	275 N/mm ²
Radius of inertia i _y	7,21 cm
Radius of inertia i _z	4,24 cm
Section modulus W _Y	125,56 cm ³
Section modulus W _Z	86,69 cm ³

Remark

Note bei 8 m Lieferlänge gesonderte Lieferbedingungen
beachten

Note for delivery length 8 m please attend to special conditions