
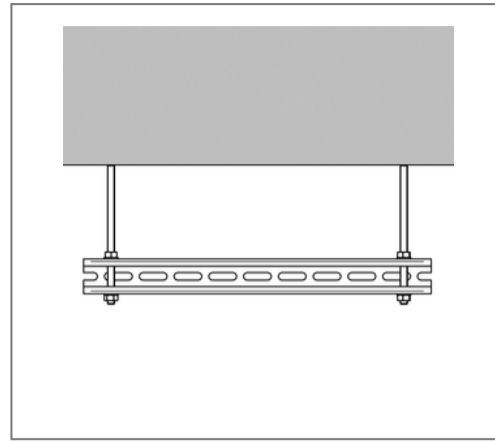
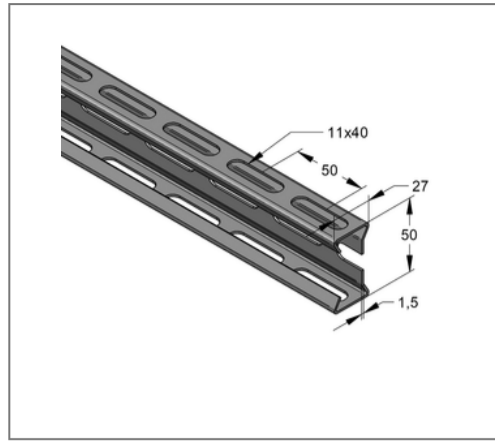



■ **SIGNUM LP50 Packing unit: 1152 m 27 / 50 / 1,5 mm L= 2 m pre-galv.**

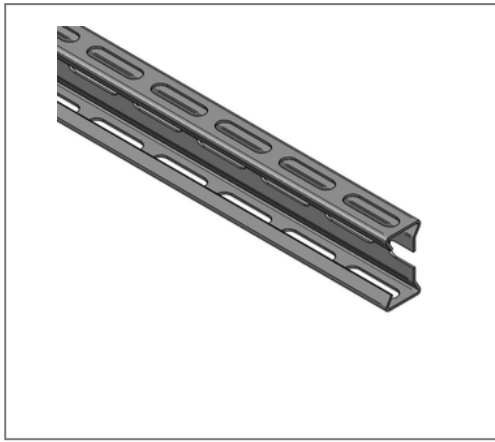

Commercial details

| | |
|---------------|---------------|
| Part no. | 0800201-1152 |
| EAN/GTIN | 4250928468031 |
| Packing unit | 1152 m |
| Bundle | 216 m |
| Quantity unit | m |
| Weight | 1,11 kg/m |
| Product group | 08-985 |
| Price unit | 1 |

QR code

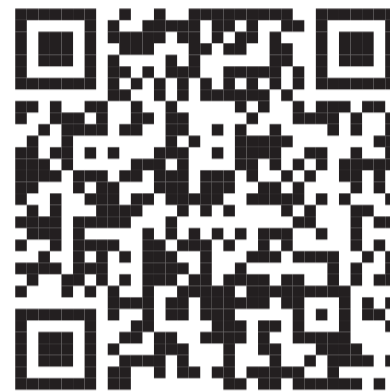

Certification



Technical data

| | |
|---------------|----------------|
| Material | Steel |
| Material type | S250 |
| Surface | pre-galvanized |

Product details

| | |
|--|-----------------------|
| Width | 27 mm |
| Height | 50 mm |
| Thickness | 1,5 mm |
| Length | 2 m |
| Elongated hole | 11x40 mm |
| Area (least cross section of the profile rail) | 1,29 cm ² |
| Axial angular impulse I _y | 5,01 cm ⁴ |
| Axial angular impulse I _z | 1,26 cm ⁴ |
| Grid dimension | 50 mm |
| Rail slot width | 11 mm |
| Centroid distance e _o | 2,5 cm |
| Centroid distance e _u | 2,5 cm |
| Centroid distance e _z | 1,54 cm |
| Elastic limit | 250 N/mm ² |
| Radius of inertia i _y | 1,97 cm |
| Radius of inertia i _z | 1,37 cm |
| Section modulus W _y | 2,01 cm ³ |
| Section modulus W _z | 0,87 cm ³ |