
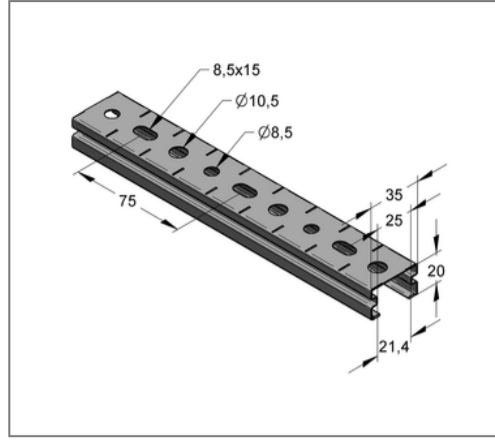


■ Profile rail C-profile Stex 35 / 20 / 0,8 mm L= 3 m pre-galv.

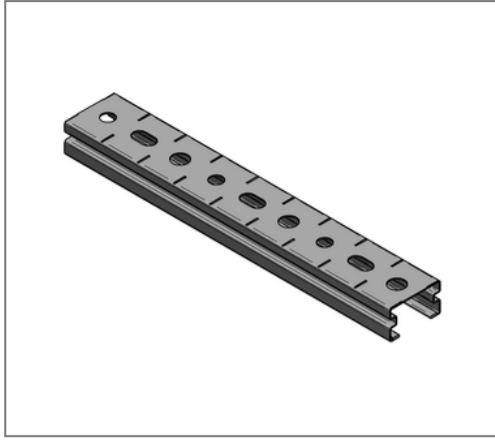

Commercial details

| | |
|---------------|---------------|
| Part no. | 1273523 |
| EAN/GTIN | 4250928424426 |
| Packing unit | 54 m |
| Bundle | 504 m |
| Quantity unit | m |
| Weight | 0,640 kg/m |
| Product group | 02-127 |
| Price unit | 1 |

QR code



Certification



Specification

| | |
|--------------------|--|
| Application area | lightweight profile rail with quick connection option. |
| Specification | Marking for fitting and to cut rails |
| Type of attachment | glide fast connection |

Technical data

| | |
|---------------|----------------|
| Material | Steel |
| Material type | S250 |
| Surface | pre-galvanized |

Product details

| | |
|--|----------------------|
| Width | 35 mm |
| Height | 20 mm |
| Thickness | 0,8 mm |
| Length | 3 m |
| Hole-Ø | 8,5 mm |
| Hole diameter 1 | 8,5 mm |
| Hole diameter 2 | 10,5 mm |
| Elongated hole | 8,5x15 mm |
| Area (least cross section of the profile rail) | 0,74 cm ² |
| Axial angular impulse I _y | 0,4 cm ⁴ |
| Axial angular impulse I _z | 1,53 cm ⁴ |
| Grid dimension | 25 mm |
| Rail slot width | 21 mm |
| Centroid distance e _o | 0,97 cm |
| Centroid distance e _u | 1,03 cm |

Remark

| | |
|-------------------------|-----------------------|
| Notice | Full bundles, only |
| Elastic limit | 250 N/mm ² |
| Radius of inertia i_y | 0,74 cm |
| Radius of inertia i_z | 1,44 cm |
| Section modulus W_y | 0,39 cm ³ |
| Section modulus W_z | 0,87 cm ³ |