
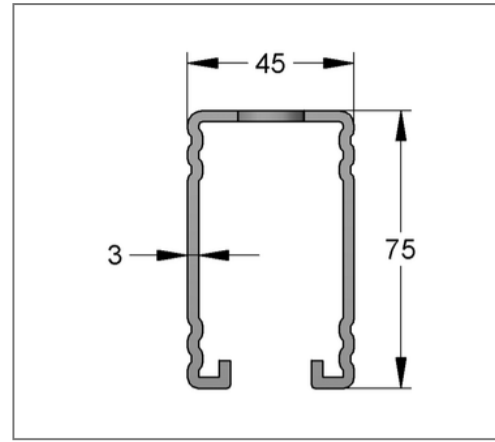
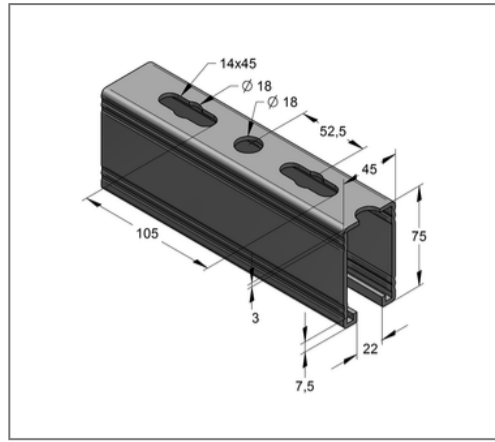



■ Profile rail C-profile 45 / 75 / 3 mm L= 6 m hot-dip galv.

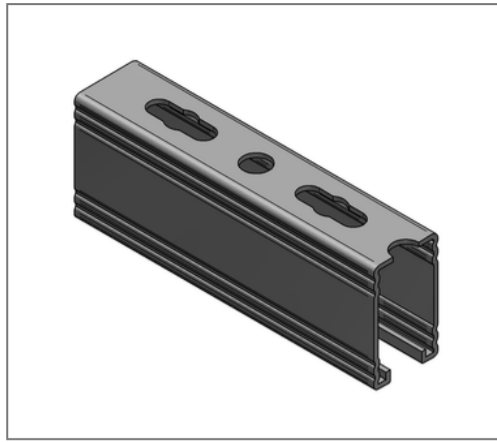

Commercial details

| | |
|---------------|---------------|
| Part no. | 08207561 |
| EAN/GTIN | 4250928420770 |
| Packing unit | 30 m |
| Bundle | 180 m |
| Quantity unit | m |
| Weight | 5,15 kg/m |
| Product group | 02-082 |
| Price unit | 1 |

QR code

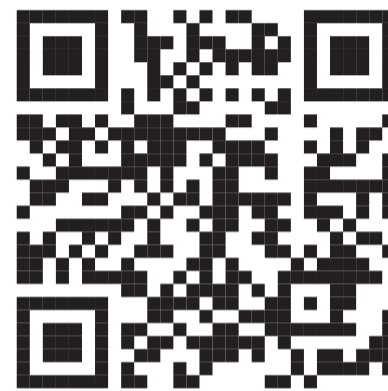

Certification



Specification

| | |
|--------------------|--|
| Application area | Medium weight mounting rail with quick connection option. |
| Specification | C-profile rail, perforated and toothed |
| Type of attachment | form-locking connections and shear hole haunch connections |

Technical data

| | |
|---------------|--------------------|
| Material | Steel |
| Material type | S235 |
| Surface | hot-dip galvanized |

Product details

| | |
|--|-----------------------|
| Width | 45 mm |
| Height | 75 mm |
| Thickness | 3 mm |
| Length | 6 m |
| Hole-Ø | 18,00 mm |
| Elongated hole | 14x45 mm |
| Expansion elongated hole | 18,0 mm |
| Area (least cross section of the profile rail) | 5,66 cm ² |
| Axial angular impulse I_y | 35,36 cm ⁴ |
| Axial angular impulse I_z | 21,90 cm ⁴ |
| Grid dimension | 105,0 mm |
| Rail slot width | 22 mm |
| Centroid distance e_o | 3,71 cm |
| Centroid distance e_u | 3,79 cm |
| Centroid distance e_z | 2,25 cm |

Remark

| | |
|-------------------------|---------------------------------|
| Notice | Full bundles, only |
| Note | Teil ist nicht nach RAL geprüft |
| Radius of inertia I_z | 1,96 cm |
| Section modulus W_y | 9,34 cm ³ |
| Section modulus W_z | 9,74 cm ³ |